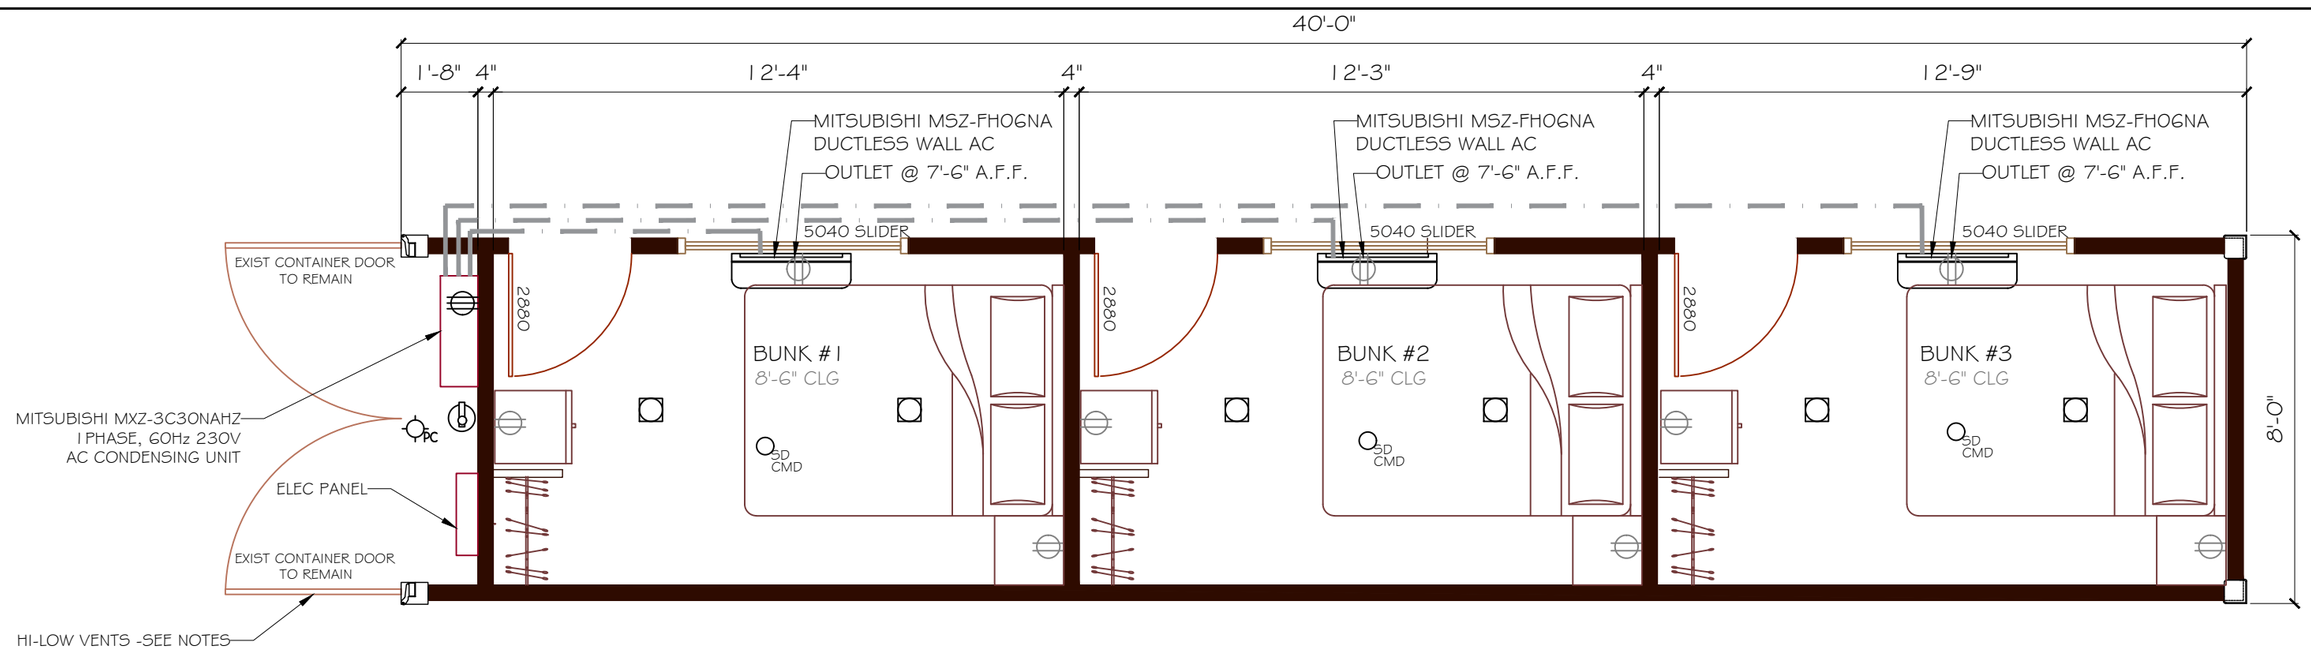

Legend

- 4" RECESSED LIGHT FIXTURE
- PC CEILING FIXTURE WITH PULL CHAIN
- SOLAR WALL MOUNTED LIGHT FIXTURE
- SD CMD SMOKE & CARBON DIOXIDE DETECTOR
- FIRE EXTINGUISHER
- DUPLEX OUTLET (110V AT +6" A.F.F. U.N.O.)
- $ SWITCH
- MECHANICAL PIPING
- MSZ-FH06NA MITSUBISHI DUCTLESS WALL AC UNIT

Floor Plan

SCALE: NTS

Notes

1. RHINO LINER FLOORING
2. INTERIOR WALL IS 2.5" INSULATED SIP WALLS
3. INTERIOR & EXTERIOR WALLS ARE 4" SIP WALLS
4. EXTERIOR IS WOOD SIDING OVER SIP WALL SYSTEM
5. 6 16"X12" HI-LO COMBUSTION AIR VENTS AT 12" A.F.F AND 12" BELOW THE CEILING IN MECHANICAL ROOM CONTAINER DOORS

DESIGN &
DRAFTING
602.299.8755
DAWNMDAZ@GMAIL.COM

Atomic Container Homes

40' 3 PERSON EXECUTIVE UNIT

5/16/2017
1 40' CONTAINER
CUSTOMIZABLE
TOTAL: 320 S.F.

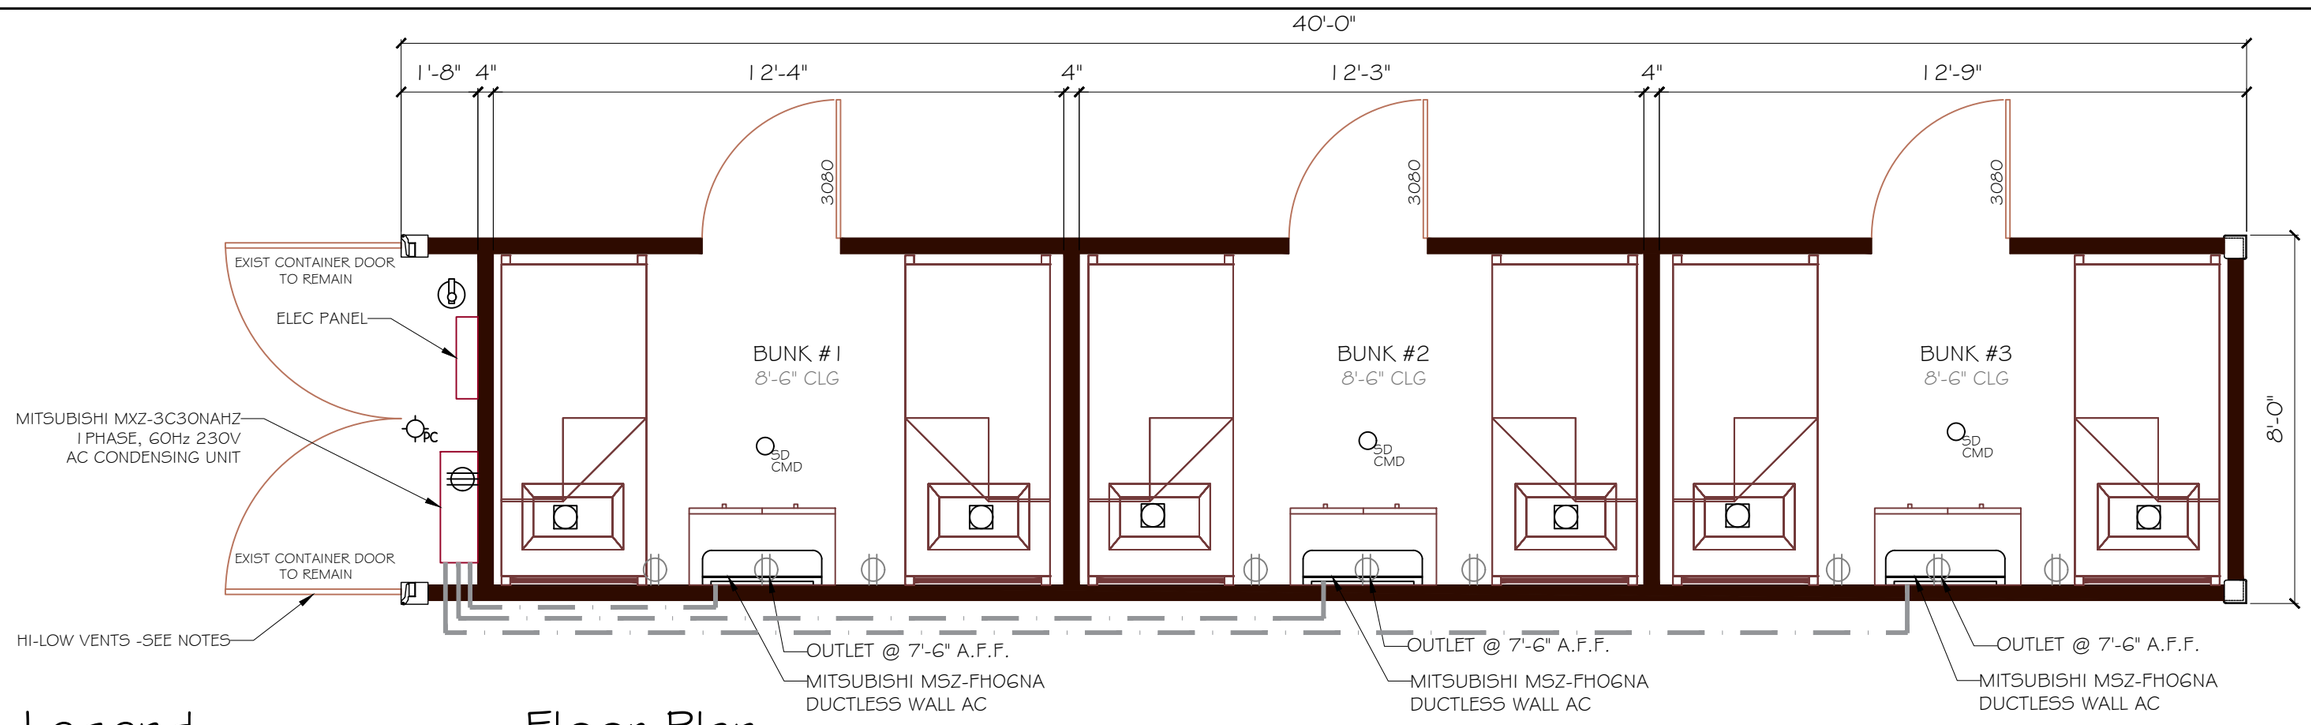

Floor Plan

SCALE: NTS

Legend

- 4" RECESSED LIGHT FIXTURE
- PC CEILING FIXTURE WITH PULL CHAIN
- SOLAR WALL MOUNTED LIGHT FIXTURE
- SD CMD SMOKE & CARBON DIOXIDE DETECTOR
- FIRE EXTINGUISHER
- DUPLEX OUTLET (110V AT +6" A.F.F. U.N.O.)
- $ SWITCH
- MECHANICAL PIPING
- MSZ-FH06NA MITSUBISHI DUCTLESS WALL AC UNIT

Notes

1. RHINO LINER FLOORING
2. INTERIOR WALL IS 2.5" INSULATED SIP WALLS
3. INTERIOR & EXTERIOR WALLS ARE 4" SIP WALLS
4. EXTERIOR IS WOOD SIDING OVER SIP WALL SYSTEM
5. 6 16"X12" HI-LO COMBUSTION AIR VENTS AT 12" A.F.F AND 12" BELOW THE CEILING IN MECHANICAL ROOM CONTAINER DOORS

DESIGN & DRAFTING
602.299.8755
DAWNMDAZ@GMAIL.COM

Atomic Container Homes

40' 6 PERSON UNIT

5/16/2017
1 40' CONTAINER
CUSTOMIZABLE
TOTAL: 320 S.F.